




# Leyard TVF1.5

## LED Video Wall

The Leyard® TVF1.5 is an affordable fine pitch LED video wall display in a 1.5 millimeter pixel pitch. With a slim profile and 27" display, Leyard TVF Series features front serviceability and a creative stackable design that eliminates cabinet-to-cabinet cabling and reduces complexity of installation and vertical alignment.

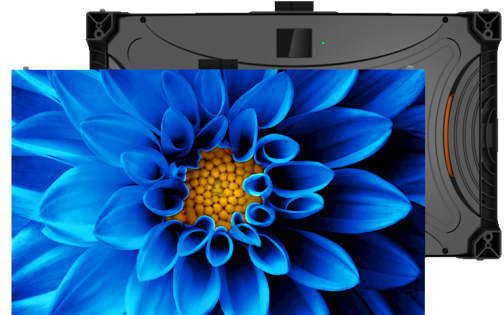

SPECIFICATION	DETAIL
Product Name	TVF1.5
Part Number	TVF1.5
Pixel Pitch	1.575mm
LED Type	Commercial grade 3-in-1 Black SMD
Cabinet Resolution	384 x 216
LEDs per Cabinet	82944
Pixel Density	403124/sq m   37451/sq ft
Cabinet Size (W x H x D)	604.8 x 340.2 x 72.5mm   23.81 x 13.39 x 2.85in
Flatness	0.5mm
Cabinet Diagonal	693.9mm   27.32in
Cabinet Area	0.2058/sq m   2.211/sq ft
Modules/Cabinet (W x H)	2 x 2
Module Resolution	192 x 108
LEDs per Module	20736
Module Size (W x H)	302.4 x 170.1mm   11.9 x 6.7in
Power Consumption, Maximum (watts)	180/Cabinet   874/sq m
Power Consumption, Typical (watts)	54/Cabinet   262/sq m
Line Voltage	100~240V AC, 50/60Hz
Cabinet Weight (per display)	6.94kg   15.3lb
Cabinet Weight (per m <sup>2</sup> )	26kg   57.32lb

<b>Brightness Max, Calibration On (cd/sq)</b>	600
<b>Contrast Ratio</b>	7000:1
<b>Brightness Uniformity</b>	97%
<b>Color Uniformity</b>	97%
<b>LED Refresh Rate</b>	3000
<b>Color Temperature, Adjustable (k)</b>	3000 - 10000
<b>Viewing Angle, Horizontal</b>	160°
<b>Viewing Angle, Vertical</b>	140°
<b>Video Inputs</b>	1x DVI, 1x HDMI, HDCP Compliant
<b>Video Input Resolution Maximum</b>	1920 x 1200 @ 60Hz (per controller)
<b>Frame Rate</b>	50, 60Hz
<b>Control Input Type</b>	USB
<b>Gray Scale Processing</b>	16-bit
<b>Service Access</b>	Front, Rear
<b>Runtime Duty Cycle (Hours/Day)</b>	24/7
<b>LED Lifetime, Typical</b>	100000hrs
<b>Environment</b>	Indoor
<b>Power Supply</b>	Single   Redundant
<b>Storage Temperature/Humidity (degrees F/C) 10-85% relative humidity, non-condensing</b>	-20° to 60° C   -4° to 140° F
<b>Operating Temperature/Humidity (degrees F/C) 10-80% relative humidity, non-condensing</b>	-10° to 40° C   -14° to 104° F

For more information, please visit [www.leyard.com](http://www.leyard.com)

*Specifications are subject to change without notice.*

*Specification Report Date: 9/21/2019*

*© Copyright 2019 Leyard All rights reserved*