




# Leyard uEV5

## LED Video Wall

The Leyard® uEV Series is a line of high-impact, large format LED video walls available in 4, 5 and 6 millimeter pitches that are ideal for indoor digital signage applications. The Leyard uEV Series is highly reliable and easy to maintain, providing 24x7 operation. With front serviceability, durable quality and superb LED technology, the Leyard uEV Series provides a viewing experience that is unmatched in the marketplace.

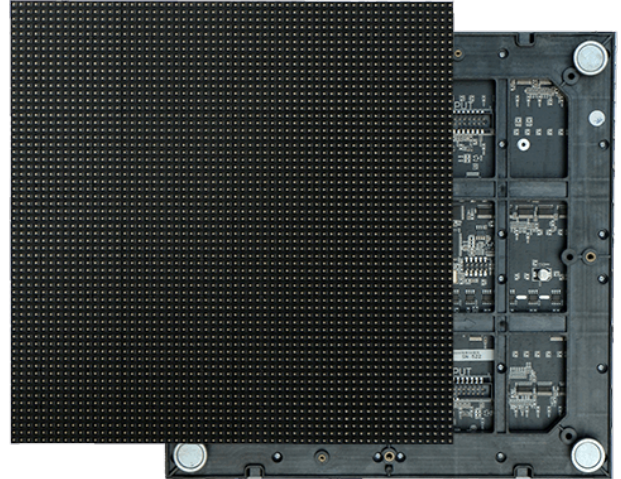

SPECIFICATION	DETAIL
Product Name	uEV5-G
Planar Part Number	uEV5-G
Pixel Pitch	5.0mm
Resolution (per LED Cabinet)	144x192
Pixel Density (Pixels per LED Cabinet)	27,648
Pixel Density	3,716 per sq. foot (40,000 per sq. meter)
LED Type	3-in-1 SMD
Pixel Configuration	SMD 3-in-1 (1R1G1B)
LED Configuration	1 Red, 1 Green, 1 Blue
Brightness, Uncalibrated, Calibrated	800-1,000 nits
Brightness, Uniformity	97%
Viewing Angle, Horizontal	160°
Viewing Angle, Vertical	160°
Color Uniformity	within $\pm 0.003CxCy$
Color Temperature, Adjustable (k)	3,200-9,300, adjustable
Contrast Ratio	1,000:1
Frame Rate	50, 60 Hz

<b>LED Refresh Rate</b>	1,920 Hz
<b>Power Consumption, Maximum (watts)</b>	380/cabinet, 550 per sq. meter
<b>Power Consumption, Typical (watts)</b>	185 per sq. meter
<b>Runtime Duty Cycle</b>	24x7
<b>LED Lifetime</b>	50,000 hours
<b>Lifetime: Typical</b>	100,000 hours to half brightness
<b>Acoustic Noise</b>	Fanless Operation
<b>Operating Temperature/Humidity (degrees F/C, relative humidity)</b>	+32° to +104°F (-10° to +40°C) at 10-80% RH
<b>Storage Temperature/Humidity (degrees F/C, relative humidity)</b>	+14° to +122°F (-10° to +50°C) at 10-70% RH
<b>LED Cabinet Size (W x H x D)</b>	28.35" x 37.80" x 5.35" (720 mm x 960 mm x 136 mm) (cabinet only, not including mount)
<b>LED Cabinet Diagonal</b>	47.24" (1,200 mm)
<b>LED Cabinet area</b>	7.44 sq. feet (0.6912 sq. meters)
<b>LED Cabinet Weight</b>	99.2 lbs (45 kg)
<b>Warranty</b>	2 year limited warranty
<b>Environment</b>	Indoor
<b>Line Voltage</b>	110-240 Volts AC, 50 & 60Hz
<b>Video Input Type</b>	HDMI, DVI
<b>Video Input Resolution Maximum</b>	2560x1600 @ 60 Hz
<b>Regulatory Compliance</b>	UL, CE, FCC
<b>Display Control</b>	Leyard® Control Software included
<b>Control Input Type</b>	USB
<b>Resolution (per LED Display Module)</b>	48 x 48
<b>LED Display Module Size (W x H x D)</b>	9.5" x 9.5" x 0.6" (240 mm x 240 mm x 16 mm)
<b>LED Display Module Weight</b>	1.2 lb (0.55 kg)
<b>Power Consumption, Maximum (watts)</b>	28 per module
<b>LED Display Module Configuration</b>	3 x 4
<b>Aluminum Frame Weight</b>	43 lbs (19.5 kg) per cabinet   62.2 lbs (28.2 kg) per sqm

For more information, please visit [www.leyard.com](http://www.leyard.com)

*Specifications are subject to change without notice.*

*Specification Report Date: 1/18/2018*

*© Copyright 2018 Leyard All rights reserved*